







Draco
HSL LED



The attachment of the Wheel Mark is in conformity with 96/98/EC, MED

Technical Data

Name & No.	Watt	kg total	Description
Draco HSL LED	3,5W	3,60	• IP 56 • body is made of marine grade aluminium, powdercoated • RAL 9016, toughened soda-lime glass lens, super purity • aluminium mirror • sighting tube is integrated, with rubber eyepiece • incl. high Power LED 3,5W • light intensity: 60.000 cd • lighting current: approx. 300 lm • range: 180m - 2 lux • signal range day: 2 NM / 3,6 km • beam: 2° • Signalling: electric groping • 3 lithium-ion cells a 4,2 V • charger: 230/12 V 1,2 A • durability diode: 50.000 hrs. in continious operation (manufacturers data) • scope of delivery: carry case and batteries • weight complete: 3,6 kg; case: 2 kg, signalling light: 1,6 kg • certification by IMO Resolution • MSC 95(72) IEC 60945 und ISO 25861

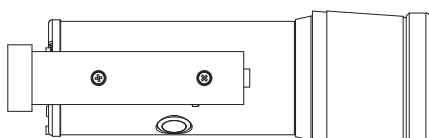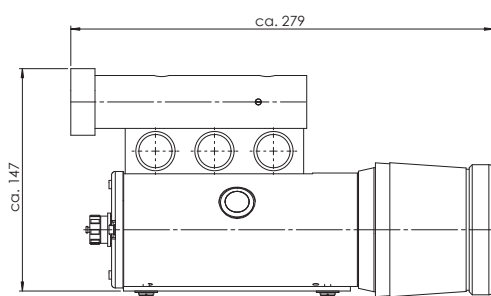

Spare Parts

No.	Description
2201809	battery charger 100-240V/max 0,35A
2201807	carry case
9200559	battery
9201130	flange socket HSL LED